



DETECTION OF DIABETIC RETINOPATHY USING DEEP LEARNING METHODOLOGY

SANTOSHI SOLAPURE (KJEI'S) Trinity College of Engineering and Research, Pune, India

RUPALI MASKE (KJEI'S) Trinity College of Engineering and Research, Pune, India

RUCHIRA TARE (KJEI'S) Trinity College of Engineering and Research, Pune, India

Abstract—

Diabetic retinopathy is a complication of diabetes that targets the eyes by damaging the retinal blood vessels. Initially it is asymptomatic or causes fluctuating vision problems. As it becomes severe, it affects both the eyes and eventually causes partial or complete vision loss. Primarily occurs when the blood sugar level is unmanageable. Therefore, the person with diabetes mellitus is always at a high risk of acquiring this disease. The early detection can deter the contingency of complete and permanent blindness. Thus, requires an efficient screening system. The present work considers a deep learning methodology specifically a Densely Connected Convolutional Network DenseNet-169, which is applied for the early detection of diabetic retinopathy. It classifies the fundus images based on its severity levels as No DR, Mild, Moderate, Severe and Proliferative DR. The datasets that are taken into consideration are Diabetic Retinopathy Detection 2015 and Aptos 2019 Blindness Detection which are both obtained from Kaggle. The proposed method is accomplished through various steps: Data Collection, Preprocessing, Augmentation and modelling. Our proposed model achieved 90% of accuracy. The Regression model was also employed, manifested up an accuracy of 78%. The main aim of this work is to develop a robust system for detecting DR automatically.

Index Terms—

DR, SVM, DT, KNN. DenseNet169, LTP (Local Ternary Pattern) and LESH (Local Energy-based Shape Histogram)

I. INTRODUCTION

Diabetes is one of the most common diseases and its prevalence has increased worldwide. It is primarily associated with the production of insulin and high blood sugar of the body [1] resulting in the anomalous metabolic functions and complications like cardiovascular diseases, kidney failures, neural disorders and diabetic retinopathy (loss of vision), etc. Diabetic retinopathy is a crucial eye condition which results in loss of vision that cannot be reversed or corrected once experienced. The people who have a long history of diabetes are more prone to get afflicted with this disease, no matter whether a person is type1 or type2 diabetic, the probability of the disease increases as the age increases [2]. According to WHO, DR is an intense eye disease that requires urgent contemplation at an international level. According to a report, in India there are about 12,000 ophthalmologists for 60 million diabetics with eye disorder. The main reason for such an alarming number of patients is the result of the fact that mostly people are oblivious that they are suffering from this disorder. They also show insensitivity and an incautious attitude towards this disease. About 18% of people with diabetes are suffering from DR and the possibility of procurement of DR in a diabetic person is 25 times more than that of a healthier.

The detection of this disorder is difficult to diagnose at an initial stage, owing to the fact that it is asymptomatic or shows very mild symptoms thus leaves a person in oblivion and eventually leads to vision impairment. Thus to detect DR at an early stage is pivotal in averting the complexities of this disorder. The diagnostics of this illness requires the professionals and specialists with highly effective equipment's and techniques that foster the advancements in leveraging the prognosis of this condition. The image of normal retina and the Retina with Diabetic retinopathy is shown in figure 1 and figure 2 respectively. Since an unerring automatic detection technique is required to classify and circumspect the severity level of DR. Mostly research in the area of DR was carried out on the basis of feature



extraction using machine learning approaches, but the problem rose with the manual feature extraction which prompted researchers towards deep learning. The further research in medical fields paved path for many computer aided technologies like data mining, image processing, machine learning and deep learning. However, the Deep Learning has gained popularity in recent years in various fields like sentiment analysis, hand written recognition, stock market prediction and medical image analysis, etc. CNN in deep learning tends to provide constructive results when it come to the job of image classification.

II. RELATED WORK

Diabetic Retinopathy is one of the grave concerns that engrossed the whole world. Receiving the attention from various researchers in order to find the optimal solutions for the early detection of this disease, consequently leading to the prevention of premature fluctuations in vision. Many studies have been conducted and still continues in this field with an aim to ease the lives of both doctors as well as patients. This section provides a review of many research works in the area of Diabetic retinopathy. J.calleja.et al [6] in their work used a two staged method for Diabetic retinopathy detection: LBP (Local Binary Patterns) for feature extraction and Machine Learning specifically SVM and Random Forest for classification purpose. The results obtained by the random forest outperformed the SVM with an accuracy of 97.46%. However, the dataset used in this study was quite small with 71 images. Earlier works were based on manual feature extraction for detection of DR using various computer based systems. U.Acharya.et al[7] used features like blood vessels, microaneurysms, exudates, and haemorrhages from 331 fundus images using SVM with an accuracy of more than 85%. K. Anant.et al[8] in their literature used texture and wavelet features for DR detection by making use of data mining and image processing on a database DIARETDB1 and achieved 97.95% accuracy. M.Gandhi.et al[9] proposed a method for automatic DR detection with SVM classifier by detecting exudates from fundus images. Some works try to integrate manual feature extraction with deep learning feature extraction for DR. one of such work include J.Orlando.et al [10] where CNN with hand crafted feature are used for feature extraction for detecting red lesion in the retina of an eye. S.Preetha et al.[11] In their literature predicted various diabetic related diseases using Data Mining and machine learning methods specifically for heart disease and skin cancer prediction while considering both advantages and disadvantages. While many researches or works are there about using machine learning approaches or data mining approaches, a quite different approach also came into the way of detection of diabetic retinopathy. S.Sadda et al. [12] make use of quantative approach to identify new parameters for detecting proliferative diabetic retinopathy. It is based on the hypothesis that location, number and area of lesions can improve the forecasting process of Retinopathy. The methods used for this study were Subjects and Imaging Data, Ultrawide Field Image Lesion Segmentation, Quantitative Lesion Parameters and Statistical Analysis. Comparison of lesions were made on the basis of Lesion number, Lesion surface area, Lesion distance from the ONH center and Regression analysis. The work presented by J.Amin et al. [13] provides a review of various methodologies for diabetic retinopathy by detecting hemorrhages, microaneurysms, exudates and also blood vessels, and analyzes the various results obtained from theses methodologies experimentally in order to give indepth insight of ongoing research. The study carried out by Y.Kumaran and C.Patil [14] focuses on the different types of preprocessing and segmentation techniques mostly and gives an in detail procedure for detection of diabetic retinopathy in human eye consisting of number of systems and classifiers. M.Chetoui et al.[15] Proposes a diagnostic method for DR using machine learning specifically SVM and Texture features. Texture features used were LTP (Local Ternary Pattern) and LESH (Local Energy-based Shape Histogram) that provided better results when compared to Local Binary Pattern (LBP). The accuracy of 90.4% was obtained by LESH with SVM. Deep learning is the most popular approach among researchers for detection, prediction, forecasting and classification task in various fields from few years, in medical field particularly in diabetic retinopathy it is unveiling many possibilities for the prevention of such a dreadful disease. I.Sadek et al.[16] in their work automatically detected the

diabetic retinopathy using deep learning approach. They used the four convolutional neural network to classify the diabetic retinopathy into three classes as Normal, Exudates, Drusen. This method outperforms the Bag of words approach and achieved an accuracy of 91%-92%. G.Zago et al.[17] in their study designed a lesion localization model using a deep network specifically convolutional neural network approach with an aim to address the models complexity so, that the performance can be improved. Instead of segmentation localization process of regions were used. Two convolutional networks were used for training purpose on a Standard Diabetic Retinopathy Database and DIARETDB1 where 94% - 95% of sensitivity was obtained. D.Doshi et al.[18] in their work used a GPU based convolutional neural network to classify the retinal images severity level into 5 stages. This approach used 3 models of CNN architecture and an ensemble model of the three to evaluate the results on kappa metrics. The best result were achieved by ensembling method with a score of 0.3996. The work of P.Kaur et al.[19] Presents a Neural network technique for the classification of retinal images using MATLAB. The results obtained were compared with the machine learning approach like SVM where better results were achieved. M.Voets et al.[20] in their study used a kaggle dataset EyePACS for detection of diabetic retinopathy from retinal fundus images. However, this study is the re-implementation of already existing work but on different data set which provided 95% of AUC. The difference of AUC between the original and the re-implemented method tend to be very large

III. OBJECTIVES

This paper is aimed to Detection of diabetic retinopathy using deep learning methodology.

IV. METHODOLOGY

The main objective of this work is to build a stable and noise compatible system for detection of diabetic retinopathy. This work employs the deep learning methodology for detecting the diabetic retinopathy based on severity level (No DR, Mild, Moderate, Severe and Proliferative DR). Many processes were carried out before feeding the images to the network. We trained two models in this work: our proposed model and the regression model and then a comparison was made between the accuracies obtained by the two models. Though our proposed model performed better than the regression model. The figure 4 shows the proposed methodology.

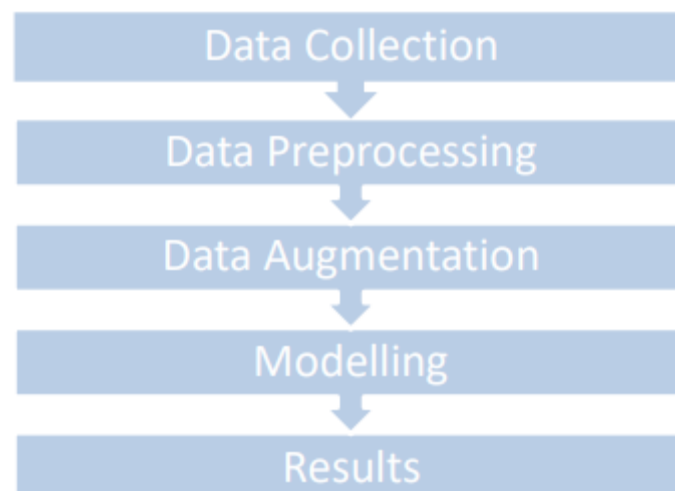


Figure 4 Proposed Methodology

3.1 Data Source: Data used for this study has been taken from Diabetic Retinopathy Detection 2015[21] and APTOS 2019 blindness detection[22] from kaggle. Both the datasets contains thousands of retinal images under different conditions. For every subject, two images of both the eyes are given as left and right. As the images come from different sources like different cameras, different models,

etc. It has an abundance of noise associated with it, which apparently needs to be removed, thus, requiring a number of preprocessing steps. The diabetic retinopathy associated with each image has been rated on the scale of 0-4 as: 0 - No DR → 1 - Mild → 2 - Moderate → 3 - Severe → 4 - Proliferative DR → Figure 5 shows the retinal images with ratings on the basis of severity level from 0-1.

Figure 5 shows the retinal images with ratings on the basis of severity level from 0-1.




Figure 5 Image samples based on severity from dataset: (a) is level '0', (b) is level '1', (c) is level '2', (d) is level '3', (e) is level '4'.

3.2 Data Preprocessing As the images in the dataset contains a lot of noise, like some images may be out of focus, some may have a lot of exposure, some may have extra lighting, presence of the black background, etc. so we need to do preprocessing in order to get them in the standard format. Following things are carried out in preprocessing step: Cutting the black border: The black background of the fundus image does not add any information to the image and is therefore useless so, the black background around the images are omitted. Remove the black corner: After removing the black border there still exist some black corners as the fundus image is round in shape. In this step black corners are removed from the image. Resizing image: The images are resized to 256*256 (width*height). Applying the Gaussian Blur: Gaussian blur is applied to the images by specifying the kernel size to 256/6. This method helps in removing the Gaussian noise.

V. DISCUSSION

Proposed model using DenseNet-169 on a combination of dataset from Diabetic Retinopathy Detection 2015[21] and APTOS 2019 blindness detection[22] from kaggle. There was a lot of noise associated with the images provided by the dataset therefore, preprocessing was needed. For preprocessing, we first removed the black border of the images in order to focus more on the fundus image only, black corners of images was also removed, then the images were resized to a standard format of 256*256 of width and height. At last a Gaussian blur was applied to the images in order to remove the Gaussian noise. After preprocessing we analyze that the data is highly unbalanced among the severity classes, majority of data belonged to the class '0' i.e. No DR. in order to address this issue, we used data augmentation, which gives us 7000 images from each severity class and made the data balanced. After preprocessing and augmentation of images, data was finally fed to the DenseNet-169 for training the model. After evaluating our model the training accuracy of 0.953 was obtained, while as validation accuracy of 0.9034 was achieved. We also calculated the Cohen Kappa score which comes out to be 0.804. We also applied a regression model to our dataset and compute its validation accuracy which is 0.789. Our proposed model outperforms the regression model.

The figure 12 shows the comparison between the accuracies obtained by the proposed model and regression model.

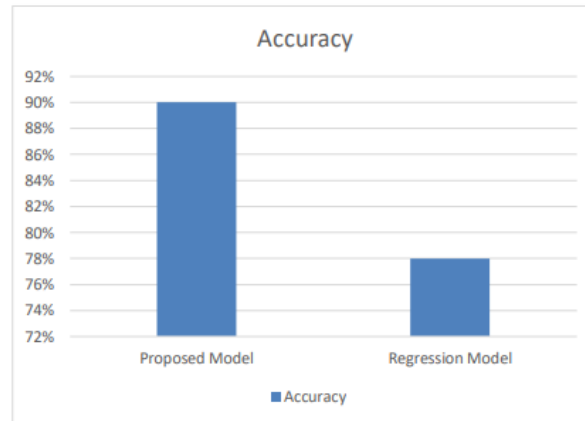


Figure 12 Accuracy Obtained By Proposed Model and Regression Model

VI. CONCLUSION

Proposed model using DenseNet-169 on a combination of dataset from Diabetic Retinopathy Detection 2015[21] and APTOS 2019 blindness detection [22] from kaggle. There was a lot of noise associated with the images provided by the dataset therefore, preprocessing was needed. For preprocessing, we first removed the black border of the images in order to focus more on the fundus image only, black corners of images was also removed, then the images were resized to a standard format of 256*256 of width and height. At last a Gaussian blur was applied to the images in order to remove the Gaussian noise. After preprocessing we analyze that the data is highly unbalanced among the severity classes, majority of data belonged to the class '0'.i.e. No DR. in order to address this issue, we used data augmentation, which gives us 7000 images from each severity class and made the data balanced. After preprocessing and augmentation of images, data was finally fed to the DenseNet-169 for training the model. After evaluating our model the training accuracy of 0.953 was obtained, while as validation accuracy of 0.9034 was achieved. We also calculated the Cohen Kappa score which comes out to be 0.804. We also applied a regression model to our dataset and compute its validation accuracy which is 0.789. Our proposed model outperforms the regression model.

The figure 12 shows the comparison between the accuracies obtained by the proposed model and regression model.

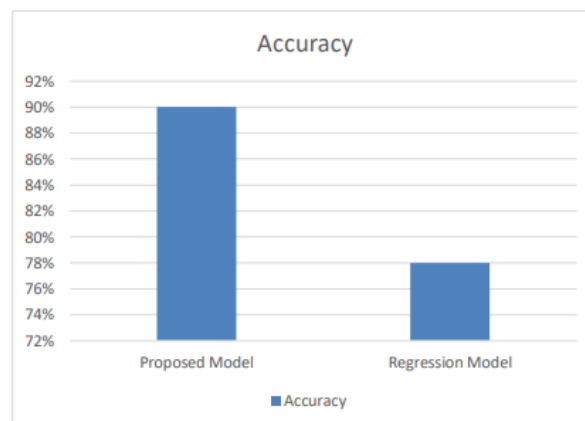


Figure 12 Accuracy Obtained by Proposed Model and Regression Model

Traditional method for detection of DR is prolonged, challenging and costly, thus many researches were brought up to automate the detection process by using machine learning and deep learning approaches. In this work, we presented a comprehensive study of various methodologies for detecting diabetic retinopathy automatically and attempted to propose our own deep learning approach for the early diagnosis of retinopathy by using a DenseNet169(which is a new CNN architecture, having many deep layers). Two datasets: 'Diabetic Retinopathy Detection 2015'and 'APTOS 2019 blindness



detection' from kaggle were used together for this study. A lot of preprocessing and augmentation was done to standardize the data in a desired format and to remove the unwanted noise. Beside DenseNet-169 classifier, we also used a regression model to draw the comparison between the results. Moreover, machine learning classifiers like SVM, DT and KNN were compared with the proposed system. Where the best accuracy among all was obtained by the proposed model and it also classifies the images into more no of classes. Our proposed model performed better than the regression model by achieving the accuracy of 90% however, 78% accuracy was yielded by the regression model.

VI. REFERENCES (CHICAGO STYLE)

- [1] <https://www.medicalnewstoday.com/articles/323627>.
- [2] <https://www.mayoclinic.org/diseases-conditions/diabetic-retinopathy/symptomscauses/syc-20371611>.
- [3] S. K. Pandey and V. Sharma, "World diabetes day 2018: Battling the Emerging Epidemic of Diabetic Retinopathy," *Indian J Ophthalmol*.
- [4] https://www.health.harvard.edu/a_to_z/retinopathy-a-to-z
- [5] <https://missinglink.ai/guides/convolutional-neural-networks/convolutional-neuralnetworks-architecture-forging-pathways-future/>
- [6] J. De Calleja, L. Tecuapetla, and M. A. Medina, "LBP and Machine Learning for Diabetic Retinopathy Detection," pp. 110–117, 2014.
- [7] U. R. Acharya, C. M. Lim, E. Y. K. Ng, C. Chee, and T. Tamura, "Computer-based detection of diabetes retinopathy stages using digital fundus images," *Proc. Inst. Mech. Eng. Part H J. Eng. Med.*, vol. 223, no. 5, pp. 545–553, 2009, doi: 10.1243/09544119JEIM486.
- [8] K. A. Anant, T. Ghorpade, and V. Jethani, "Diabetic retinopathy detection through image mining for type 2 diabetes," in *2017 International Conference on Computer Communication and Informatics, ICCCI 2017*, 2017, doi: 10.1109/ICCCI.2017.8117738.
- [9] M. Gandhi and R. Dhanasekaran, "Diagnosis of diabetic retinopathy using morphological process and SVM classifier," *Int. Conf. Commun. Signal Process. ICCSP 2013 - Proc.*, pp. 873–877, 2013, doi: 10.1109/iccsp.2013.6577181.
- [10] J. I. Orlando, E. Prokofyeva, M. del Fresno, and M. B. Blaschko, "An ensemble deep learning based approach for red lesion detection in fundus images," *Comput. Methods Programs Biomed.*, vol. 153, pp. 115–127, 2018, doi: 10.1016/j.cmpb.2017.10.017.
- [11] S. Preetha, N. Chandan, K. Darshan N, and B. Gowrav P, "Diabetes Disease Prediction Using Machine Learning," *Int. J. Recent trends Eng. Res.*, vol. 6, no. 5, 2020, doi: 10.23883/IJRTER.2020.6029.65Q5H.
- [12] S. R. Sadda et al., "Quantitative assessment of the severity of diabetic retinopathy," *Am. J. Ophthalmol.*, 2020, doi: 10.1016/j.ajo.2020.05.021.
- [13] J. Amin, M. Sharif, and M. Yasmin, "A Review on Recent Developments for Detection of Diabetic Retinopathy," *Scientifica*, vol. 2016. 2016, doi: 10.1155/2016/6838976.
- [14] Y. Kumaran and C. M. Patil, "A brief review of the detection of diabetic retinopathy in human eyes using pre-processing & segmentation techniques," *International Journal of Recent Technology and Engineering*, vol. 7, no. 4. pp. 310–320, 2018.
- [15] M. Chetoui, M. A. Akhloufi, and M. Kardouchi, "Diabetic Retinopathy Detection Using Machine Learning and Texture Features," in *Canadian Conference on Electrical and Computer Engineering*, 2018, vol. 2018-May, doi: 10.1109/CCECE.2018.8447809.
- [16] I. Sadek, M. Elawady, and A. E. R. Shabayek, "Automatic Classification of Bright Retinal Lesions via Deep Network Features," pp. 1–20, 2017.